



SIMULATION OPTIMIZATION SYSTEMS
Research Laboratory

**PARAMETERIZATION OF ARBITRARY
GEOMETRICAL STRUCTURES
FOR AUTOMATED
ELECTROMAGNETIC OPTIMIZATION**

J.W. Bandler, R.M. Biernacki and S.H. Chen

SOS-95-12-R

November 1995

1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025

**PARAMETERIZATION OF ARBITRARY
GEOMETRICAL STRUCTURES
FOR AUTOMATED
ELECTROMAGNETIC OPTIMIZATION**

J.W. Bandler, R.M. Biernacki and S.H. Chen

SOS-95-12-R

November 1995

© J.W. Bandler, R.M. Biernacki and S.H. Chen 1995

No part of this document may be copied, translated, transcribed or entered in any form into any machine without written permission. Address enquiries in this regard to Dr. J.W. Bandler. Excerpts may be quoted for scholarly purposes with full acknowledgement of source. This document may not be lent or circulated without this title page and its original cover.

**PARAMETERIZATION OF ARBITRARY GEOMETRICAL STRUCTURES
FOR AUTOMATED ELECTROMAGNETIC OPTIMIZATION**

J.W. Bandler, R.M. Biernacki and S.H. Chen

**Simulation Optimization Systems Research Laboratory
and Department of Electrical and Computer Engineering
McMaster University, Hamilton, Canada L8S 4L7**

Tel 905 525 9140 Ext. 24818

Fax 905 523 4407

Email bandler@mcmaster.ca

Full Length

Prioritized List of Areas:

- 1. EM Analytical and Numerical Techniques**
- 2. CAD Procedures, Techniques and Modeling**

**PARAMETERIZATION OF ARBITRARY GEOMETRICAL STRUCTURES
FOR AUTOMATED ELECTROMAGNETIC OPTIMIZATION**

J.W. Bandler, R.M. Biernacki and S.H. Chen

Simulation Optimization Systems Research Laboratory
and Department of Electrical and Computer Engineering
McMaster University, Hamilton, Canada L8S 4L7

Tel 905 525 9140 Ext. 24818

Fax 905 523 4407

Email bandler@mcmaster.ca

Abstract

For the first time, this paper reveals and discusses the theoretical foundation of the Geometry Capture technique. Geometry Capture facilitates user-parameterization, through graphical means, of arbitrary 2D and 3D geometrical structures. This makes it possible to optimize the shape and dimensions of geometrical objects in an automated electromagnetic design process by adjusting the user-defined parameters subject to explicit numerical bounds and implicit topological constraints.

This work was supported in part by Optimization Systems Associates Inc. and in part by the Natural Sciences and Engineering Research Council of Canada under Grants OGP0007239, OGP0042444 and STR0167080.

* The authors are also with the Simulation Optimization Systems Research Laboratory and Department of Electrical and Computer Engineering, McMaster University, Hamilton, Ontario, Canada L8S 4L7.

Manuscript submitted December 1, 1995.

SUMMARY

Introduction

Recent research results [1-5] and the corresponding explosion of available electromagnetic (EM) simulators (e.g., [6-11]) are important factors in the development of a new generation of microwave design tools. Advances in computer hardware make this approach feasible, though still very CPU intensive. The potential and importance of EM-based optimal design have been fully confirmed by recent events [12,13] and we expect widespread use of this approach in the future. The number of reported applications is already growing rapidly.

Automated EM optimization raises a number of challenges. Some have been already successfully addressed [14-18] including geometrical interpolation and modeling, reconciling and exploiting the discrete nature of numerical EM solvers with the requirement of continuous variables and gradients by the optimizers, as well as parallel computation combined with efficient data base handling. Techniques, such as Space Mapping [19,20] will play a pivotal role in effective utilization of EM design tools.

This paper addresses the critical issue (see [21]) of parameterization of geometrical structures for the purpose of layout-based design, in particular automated EM optimization. As the optimization process proceeds, revised structures must be automatically generated. Moreover, each such structure must be physically meaningful and should follow the designer's intention w.r.t. allowable modifications and possible limits. It is of utmost importance to leave the parameterization process to the user. In our earlier work (*Empipe Version 1.1, 1992*) we created a library of predefined elements (lines, junctions, bends, gaps, etc.), that were already parameterized and ready for optimization. The applicability of that approach is, however, limited to structures that are decomposable into the available library elements. No library, no matter how comprehensive, will satisfy all microwave designers, simply because of their creativity in devising new structures. Moreover, the library approach inherently omits possible proximity couplings between the elements since they are individually simulated by an EM solver and connected by a circuit-level simulator.

Geometry Capture

The most significant features of EM simulators include their unsurpassed accuracy, extended validity ranges, and the capability of handling fairly arbitrary geometrical structures. In order to take full advantage of these features the structures may need to be simulated as a whole. Decomposition into substructures, which might be desired from the point of view of computational efficiency, should be considered only if no significant couplings are neglected. This means that the microwave designer expects to be able to optimize increasingly more complex structures. To provide a tool for parameterizing such structures, we created the user-friendly Geometry Capture technique (*Empipe Version 2.0, 1994*), already announced in [22]. Here, for the benefit of the microwave community at large, we examine theoretical and implementational concepts and reveal the mathematical foundation of that technique.

Mathematical Description of Geometrical Objects

Every structure to be simulated by an EM solver consists of a number of 2D or 3D objects. Each object must be uniquely defined by its attributes and a finite ordered set of numerical values. The attributes determine the class of objects into which a particular object falls (for example, a polygon or a polytope) as well as how the numerical values are interpreted by the specific EM solver. These numerical values typically represent absolute coordinates of points which form a defining set for the object. For example, a specific polygon can be defined by a sequence of its vertices, with the assumption that each pair of consecutive vertices determines an edge, i.e., they are connected by a line segment (with the last vertex connected to the first one). In contrast, a purely mathematical description of objects such as defining its boundary by a (possibly implicit) function may not be quite practical, could limit available shapes, etc.

It is possible for some of the numerical values defining an object to represent parameters such as the length or width of a rectangle, or the angle or radius of a radial stub. Such parameters are of direct interest to the designer. If all numerical values represented such parameters and if they were readily available then there would be no need for parameterization. However, some of the values (if

not all) must represent absolute geometrical coordinates for the simple reason of indicating relative placement of an individual object w.r.t. to all other objects, as well as to facilitate handling of fairly arbitrary structures. Therefore, in the following discussion we concentrate on those absolute coordinates only, assuming for simplicity that they represent vertices.

Consider an ordered set of vertices of an object as described by

$$\mathbf{x}_{v1}, \mathbf{x}_{v2}, \dots, \mathbf{x}_{vm} \quad (1)$$

where m is the total number of vertices and each \mathbf{x}_{vi} is the vector of the vertex coordinates. Depending on the object it is either a two- or three-dimensional vector. All the vertices can be conveniently represented by a single vector

$$\mathbf{x} = [\mathbf{x}_{v1}^T \quad \mathbf{x}_{v2}^T \quad \dots \quad \mathbf{x}_{vm}^T]^T \quad (2)$$

which combines all the coordinates in an ordered manner. The space of all vectors \mathbf{x} will be denoted by X (it is either R^{2m} or R^{3m}).

Implicitly Constrained Coordinate System

Considering \mathbf{x} in (1) as a vector of unconstrained optimization variables can easily lead to unacceptable results. This is illustrated by Fig. 1. Starting from the object shown in Fig. 1(a) it is possible for the optimizer to suggest the values leading to the situation depicted in Fig. 1(b). This may pose serious difficulties - the best an EM solver can do is to employ a sophisticated rule checker and to dismiss the suggested values. Such a rule checker will not be normally available to the optimizer.

In order to impose constraints on the movement of the vertices we consider a function T mapping certain designable or optimizable parameters ϕ into X as

$$\mathbf{x} = T(\phi) \quad (3)$$

and assume that the parameters are allowed to vary within an orthotope specified by

$$\phi_{i \min} \leq \phi_i \leq \phi_{i \max}, \quad i = 1, 2, \dots, n \quad (4)$$

There will normally be very few parameters ϕ as compared with the number of vertices ($n \ll m$). The process of parameterizing an object consists of defining the parameters ϕ and the function T .

Defining Controlling Parameters and Object Evolution

As already mentioned, defining the parameters ϕ should be left to the designer who knows best what changes to the object are desired and allowable. This process is actually quite intuitive. A few rules, however, should be followed. First, there should be as few parameters as possible. Secondly, the parameters must not be inconsistent, or dependent. This means that, if independently changed, they must not contradict each other. For example, attempting to define all partial lengths as well as the total length is incorrect. A clear understanding of how the object evolves when a parameter is varied, as well as of the limits to be specified by (4) is crucial. This is particularly important in preserving the physical meaning of the object. Finally, a basic understanding of the mapping (3), as discussed in the next section, is needed. *It is worth emphasizing that the parameter values, as seen by the optimizer, are intermediate to the process of generating actual layouts.* Therefore, parameter transformations such as scaling or normalization can be used to link those optimizable parameters with the actual layout design parameters.

Object evolution and defining the parameters is illustrated by Fig. 2. Assuming that the location of the left edge is fixed the evolution of the object can be described by only one parameter in all cases. However, its definition, and more importantly its impact on the location of the vertices, will be different. The importance of the limits (4) is particularly evident in the case of Fig. 2(c). Another example is shown in Fig. 3 where one parameter controls the length of the right edge in a symmetric manner.

Defining the Mapping

The mapping (3) will be defined w.r.t. to the starting, or nominal, object \mathbf{x}^0

$$\mathbf{x}^0 = T(\phi^0) \quad (5)$$

where ϕ^0 represents the starting (nominal) values of the parameters ϕ . In other words, we consider the following form of T

$$T(\phi) = T(\phi^0) + F(\phi - \phi^0) \quad (6)$$

As long as the vectors \mathbf{x}^0 and ϕ^0 are known (specified by the designer), only the function F in (6) needs to be identified. The movement of individual vertices w.r.t. the nominal object is then

$$\mathbf{x}_{vi} = \mathbf{x}_{vi}^0 + f_i(\phi - \phi^0) \quad (7)$$

where f_i , $i = 1, 2, \dots, m$, are the subvectors of F such that

$$F = [f_1^T \ f_2^T \ \dots \ f_m^T]^T \quad (8)$$

A principal assumption we make about the mapping is that the individual functions f_i^T are additive w.r.t. the contributions due to incremental changes in individual parameters. This is mathematically expressed as

$$f_i(\phi - \phi^0) = \sum f_{ij}(\phi_j - \phi_j^0) \quad (9)$$

and, in the case of two parameters, graphically illustrated in Fig. 4. Under this assumption, defining the mapping (3) can be carried out by identifying the functions f_{ij} in (9). Each such function determines the trajectory of the movement of a specific vertex due to a change in one parameter alone. An example of such a trajectory is shown in Fig. 5. An important consequence of (9) is that F in (6) can be expressed as

$$F(\phi - \phi^0) = \sum F_j(\phi_j - \phi_j^0) \quad (10)$$

where each term on the RHS indicates the evolution of the whole object due to a change in one parameter alone. This means that the process can be split into steps in which the user characterizes the evolution of the whole structure in response to changes in one parameter at a time. Specific approaches relevant to the form of the functions f_{ij} will be presented in the final paper.

Discretization of Controlling Parameters

The problem of parameter discretization may arise out of necessity if the particular EM simulator used is a fixed grid solver. If this is the case, all the (user-defined) parameters must be discretized in such a manner that for on-grid parameter values the mapped vertices are also on the grid. This is by no means trivial: details will be included in the final paper.

Even if parameter discretization is not enforced by the EM simulator, it still might be desirable to do it in order to take advantage of existing techniques that allow significant improvement

of efficiency. These techniques include the utilization of a data base of already simulated structures in conjunction with efficient interpolation and modeling [16,17]. The benefits of these techniques include efficient gradient evaluation, handling of tolerances, efficient model evaluation in Monte Carlo analysis and yield-driven design.

Example

Consider the double folded stub microstrip filter (see for example [16]) shown in Fig. 6(a). We consider changing the width of the main line and of the stubs, the overall length of the filter, and the spacing of the folded segments of the stubs as allowable modifications to the structure. This can be controlled by the parameters L_1 , L_2 , S , W_1 and W_2 marked in the diagram. Here, the parameterization process is implemented by Empipe [23] and *xgeom* [6]. First, a nominal structure is fully characterized using *xgeom*, as shown in Fig 6(b). This includes drawing, specifying the grid, box, substrate, etc., and entering all material constants. Then, the structure is sequentially edited to reflect changes w.r.t. to each optimizable parameter. Every modified structure needs to be fully characterized. Figs. 6(c) and 6(d) show the structures corresponding to $S=4.8$ mil and to $S=11.2$ mil, respectively. Similar structures need to be drawn to reflect modifications due to the remaining parameters. Then Empipe's Geometry Capture tool captures the absolute coordinates of all the vertices for the modified as well as for the nominal structures. Finally, Empipe prompts the user to provide the values of parameters (4.8 mil and 11.2 mil in the case of Figs. 6(c) and 6(d)) corresponding to all drawings, as well as certain data needed for discretization. As a result, after performing all mathematical calculations, Empipe generates a new optimization-ready library element that can be stored and reused, accompanied by a data base for this new element.

Conclusions

We have examined theoretical concepts and formulations relevant to parameterization of arbitrary geometrical structures for automated layout-based optimization using EM tools. This is to facilitate friendly user-parameterization of user-defined geometrical objects. Once a structure has

been parameterized with user-defined parameters controlling its shape and dimensions, it becomes available for automated optimization. Significantly, the structure can be saved and reused, thus augmenting a customized library of elements.

Our theoretical derivations are not linked to any particular EM solver. Certain assumptions have been made to keep the technique simple and manageable. We expect that our innovations will become widely used in layout-based optimization-oriented applications, not only in microwave hybrid and monolithic IC design, and not only in conjunction with EM simulators.

References

- [1] J.C. Rautio and R.F. Harrington, "An electromagnetic time-harmonic analysis of arbitrary microstrip circuits," *IEEE Trans. Microwave Theory Tech.*, vol. 35, 1987, pp. 726-730.
- [2] R.H. Jansen and P. Pogatzki, "A hierarchically structured, comprehensive CAD system for field theory-based linear and nonlinear MIC/MMIC design," *1992 2nd Int. Workshop of the German IEEE MTT/AP Joint Chapter on Integrated Nonlinear Microwave and Millimeterwave Circuits Dig.* (Duisburg, Germany), 1992, pp. 333-341.
- [3] W.J.R. Hoefler, "Time domain electromagnetic simulation for microwave CAD applications," *IEEE Trans. Microwave Theory Tech.*, vol. 40, 1992, pp. 1517-1527.
- [4] V.J. Brankovic, D.V. Krupezevic and F. Arndt, "Efficient full-wave 3D and 2D waveguide eigenvalue analysis by using the direct FD-TD wave equation formulation," *IEEE MTT-S Int. Microwave Symp. Dig.* (Atlanta, GA), 1993, pp. 897-900.
- [5] J.X. Zheng, "A general purpose 3-D electromagnetic simulator and optimization package - IE3D," *IEEE MTT-S Int. Microwave Symp. Dig.* (San Diego, CA), 1994, pp. 373-376.
- [6] *em*[™] and *xgeom*[™], Sonnet Software, Inc., 135 Old Cove Road, Suite 203, Liverpool, NY 13090-3774, 1995.
- [7] *IE3D*[™], Zeland Software, Inc., 3910 Mission Street, San Francisco, CA 94112.
- [8] *LINMIC+/N Version 3.0*, Jansen Microwave, Bürohaus am See, Am Brüll 17, D-4030 Ratingen 1, Germany, 1992.
- [9] *MSC/EMAS*, The MacNeal-Schwendler Corp., 815 Colorado Blvd., Los Angeles, CA 90041-1777.
- [10] *HFSS* and *Momentum*, Hewlett-Packard Co., 1400 Fountaingrove Parkway, Santa Rosa, CA 95403.
- [11] *Micro-Stripes*, Kimberley Communications Consultants, Beeston, Nottingham NG9 2ND, UK.

- [12] F. Arndt, J.W. Bandler, W.J.R. Hoefler, A.M. Pavio, J.C. Rautio, R. Sorrentino, D.G. Swanson, Jr., S.H. Talisa, R.J. Trew, "Circuit Design with Direct Optimization-driven Electromagnetic Simulators," Panel Session, IEEE MTT-S Int. Microwave Symp. (San Diego, CA), 1994.
- [13] F. Arndt, S.H. Chen, W.J.R. Hoefler, N. Jain, R.H. Jansen, A.M. Pavio, R.C. Pucel, R. Sorrentino and D.G. Swanson, Jr., *Automated Circuit Design using Electromagnetic Simulators*. Workshop WMFE (J.W. Bandler and R. Sorrentino, Organizers and Chairmen), IEEE MTT-S Int. Microwave Symp. (Orlando, FL), 1995.
- [14] J.W. Bandler, R.M. Biernacki, S.H. Chen, P.A. Grobelny and S. Ye, "Yield-driven electromagnetic optimization via multilevel multidimensional models," *IEEE Trans. Microwave Theory Tech.*, vol. 41, 1993, pp. 2269-2278.
- [15] P.P.M. So, W.J.R. Hoefler, J.W. Bandler, R.M. Biernacki and S.H. Chen, "Hybrid frequency/time domain field theory based CAD of microwave circuits," *Proc. 23rd European Microwave Conf.* (Madrid, Spain), 1993, pp. 218-219.
- [16] J.W. Bandler, R.M. Biernacki, S.H. Chen, D.G. Swanson, Jr., and S. Ye, "Microstrip filter design using direct EM field simulation," *IEEE Trans. Microwave Theory Tech.*, vol. 42, 1994, pp. 1353-1359.
- [17] J.W. Bandler, R.M. Biernacki, S.H. Chen and P.A. Grobelny, "A CAD environment for performance and yield driven circuit design employing electromagnetic field simulators," *Proc. Int. Symp. Circuits and Systems* (London, England), vol. 1, 1994, pp. 145-148.
- [18] F. Alessandri, M. Dionigi, R. Sorrentino and M. Mongiardo, "A fullwave CAD tool of waveguide components using a high speed direct optimizer," *IEEE MTT-S Int. Microwave Symp. Dig.* (San Diego, CA), 1994, pp. 1539-1542.
- [19] J.W. Bandler, R.M. Biernacki, S.H. Chen, P.A. Grobelny and R.H. Hemmers, "Space mapping technique for electromagnetic optimization," *IEEE Trans. Microwave Theory Tech.*, vol. 42, 1994, pp. 2536-2544.
- [20] J.W. Bandler, R.M. Biernacki, S.H. Chen, R.H. Hemmers and K. Madsen, "Aggressive space mapping for electromagnetic design," *IEEE MTT-S Int. Microwave Symp. Dig.* (Orlando, FL), 1995, pp. 1455-1458.
- [21] M.A. Schamberger and A.K. Sharma, "A generalized electromagnetic optimization procedure for the design of complex interacting structures in hybrid and monolithic microwave integrated circuits," *IEEE MTT-S Int. Microwave Symp. Dig.* (Orlando, FL), 1995, pp. 1191-1194.
- [22] J.W. Bandler, R.M. Biernacki, Q. Cai, S.H. Chen and P.A. Grobelny, "Integrated harmonic balance and electromagnetic optimization with Geometry Capture," *IEEE MTT-S Int. Microwave Symp. Dig.* (Orlando, FL), 1995, pp. 793-796.
- [23] *Empipe™*, Optimization Systems Associates Inc., P.O. Box 8083, Dundas, Ontario, Canada L9H 5E7, 1995.

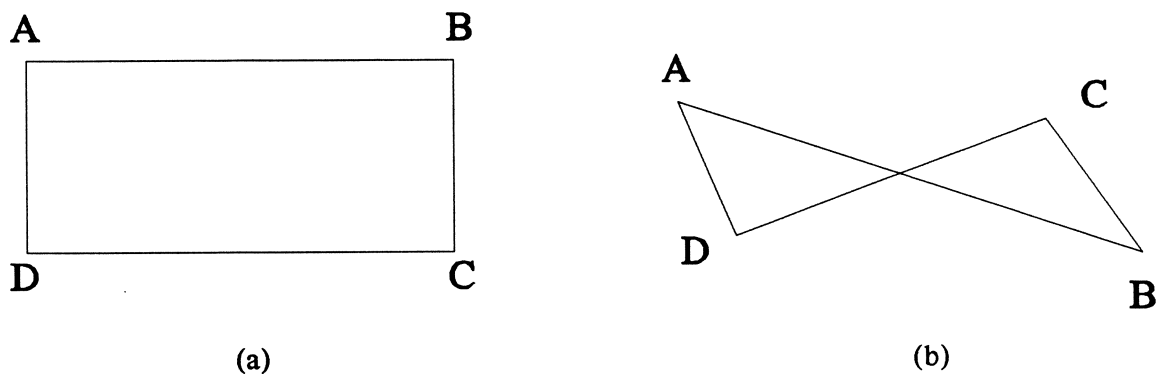


Fig. 1. Arbitrary movement of vertices of a polygon: (a) the initial geometry, and (b) an unwanted result due to an arbitrary and independent movement of vertices.

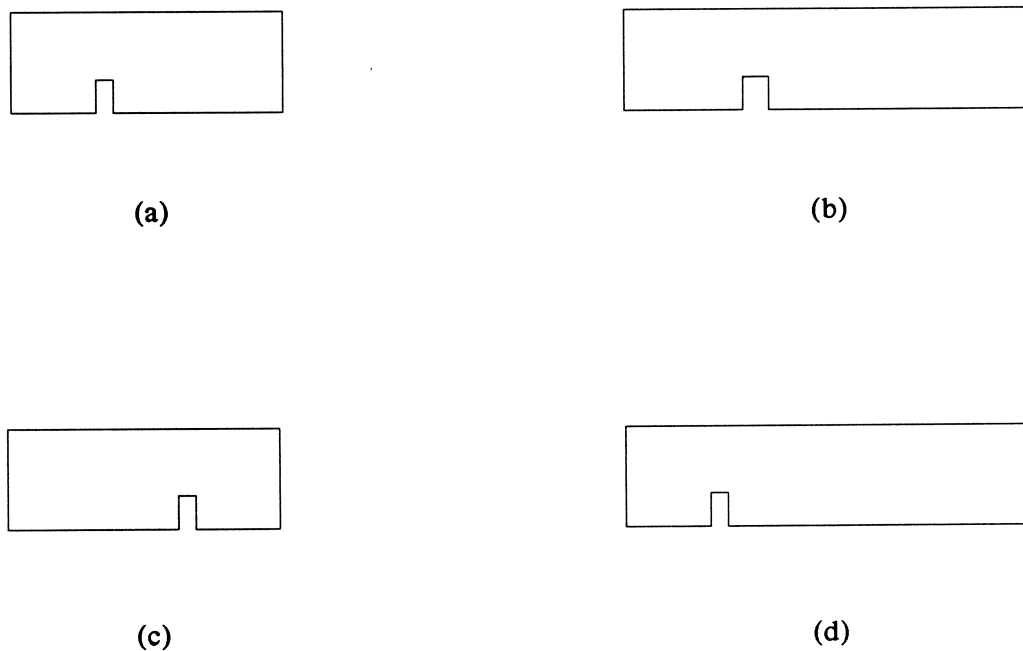


Fig. 2. Various evolutions of a microstrip line with a slit: (a) the initial geometry, (b) proportional expansion of the whole structure along the x axis, (c) only the location of the slit in the fixed line is allowed to change, and (d) only the segment to the right of the slit is allowed to expand.



Fig. 3. Evolution of a rectangle to a tapered line.

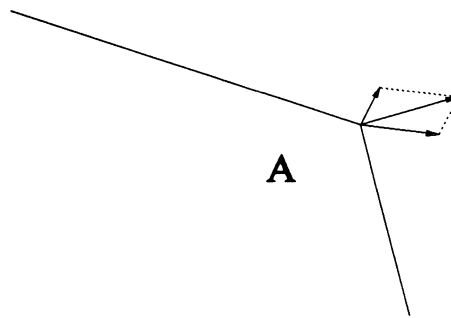


Fig. 4. Additiveness of the vertex movement w.r.t. the changes in individual parameters.



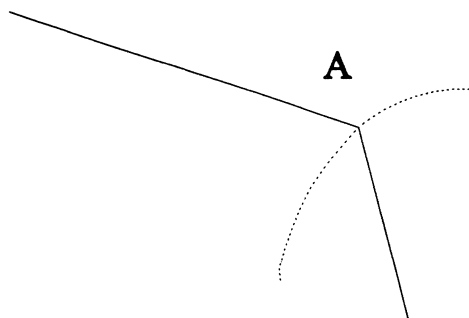


Fig. 5. Possible trajectory of the movement of a vertex with a change in a parameter.

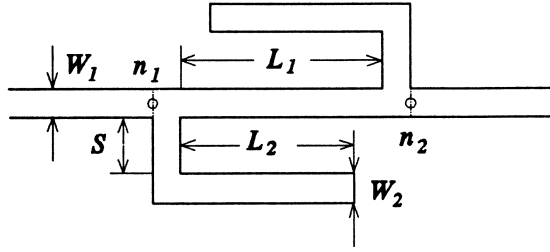


(a)

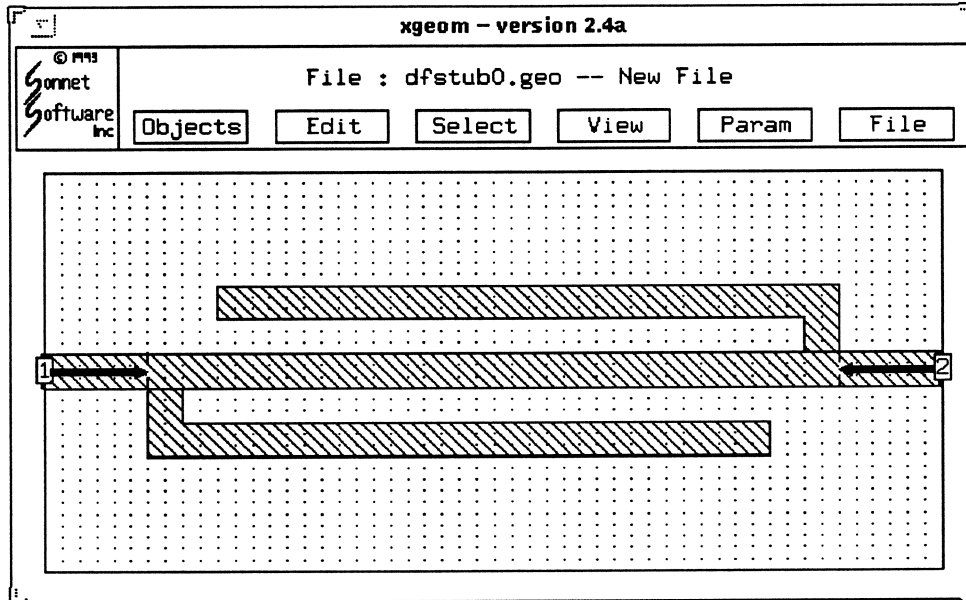


(b)

Fig. 6. Parameterization of the double folded stub filter: (a) the filter and the desired parameters, (b) the nominal geometry.

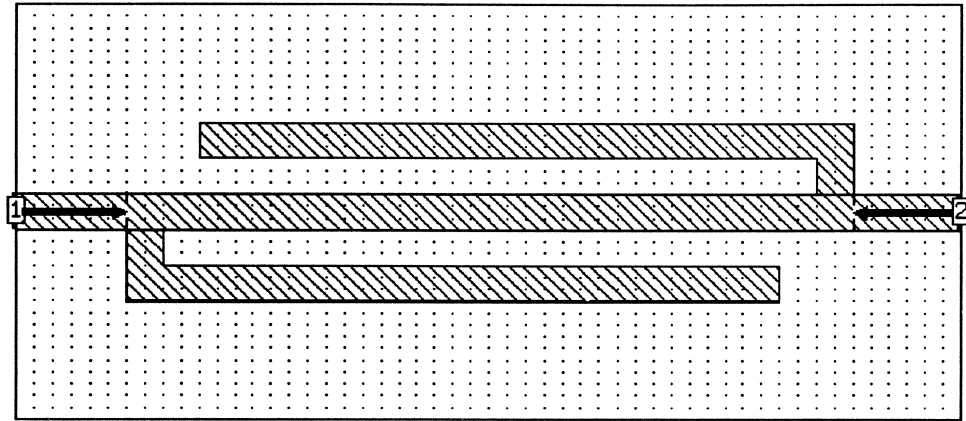

(c)

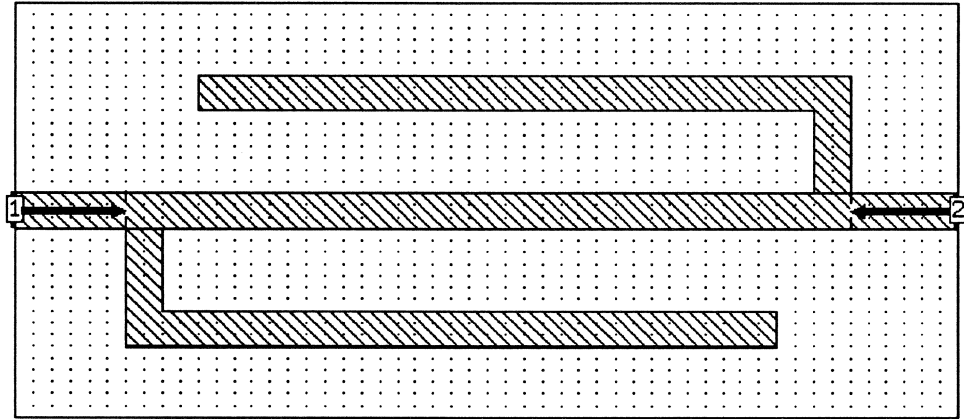

(d)

Fig. 6. (cont'd) Parameterization of the double folded stub filter: (c) the filter structure for $S=4.8$ mil, and (d) the filter structure for $S=11.2$ mil.

1111

1111

1111