

**HYBRID FREQUENCY/TIME DOMAIN
FIELD THEORY BASED CAD
OF MICROWAVE CIRCUITS**

**P.P.M. So, W.J.R. Hoefler,
J.W. Bandler, R.M. Biernacki and S.H. Chen**

SOS-93-24-V

September 1993

© P.P.M. So, W.J.R. Hoefler, J.W. Bandler, R.M. Biernacki and S.H. Chen 1993

No part of this document may be copied, translated, transcribed or entered in any form into any machine without written permission. Address enquiries in this regard to Dr. J.W. Bandler. Excerpts may be quoted for scholarly purposes with full acknowledgement of source. This document may not be lent or circulated without this title page and its original cover.

Hybrid Frequency/Time Domain Field Theory Based CAD of Microwave Circuits


P.P.M. So and W.J.R. Hofer

NSERC/MPR TELTECH Research Chair in RF-Engineering
Department of Electrical and Computer Engineering
University of Victoria, Victoria, British Columbia
Canada, V8W 3P6


J.W. Bandler, R.M. Biernacki and S.H. Chen

Optimization System Associates Inc.
P.O. Box 8083, Dundas, Ontario, Canada, L9H 5E7
and
Simulation Optimization System Research Laboratory,
Department of Electrical and Computer Engineering
McMaster University, Hamilton, Ontario
Canada, L8S 4L7

Outline




- The Essence of this Presentation
- Introduction
- Simulation Technique and Example
- Advantages and Disadvantages
- A DECmpp 12000 3D-TLM Algorithm
- DECmpp 12000 Constraints
- Conclusion




Introduction

- Field theory based microwave circuit CAD/CAM is mostly performed in the frequency domain.
- OSA90/hope is a commercially available CAD program that allows users to incorporate special elements into their circuit simulation using high speed UNIX pipe.
- Hence, OSA90/hope can run on its host machine and control external programs both in frequency and time domains running on other machines (such as DECmpp 12000).
- This paper presents a combination of OSA90/hope operating in the frequency domain with a TLM electromagnetic wave simulator operating in the time domain.

Simulation Technique

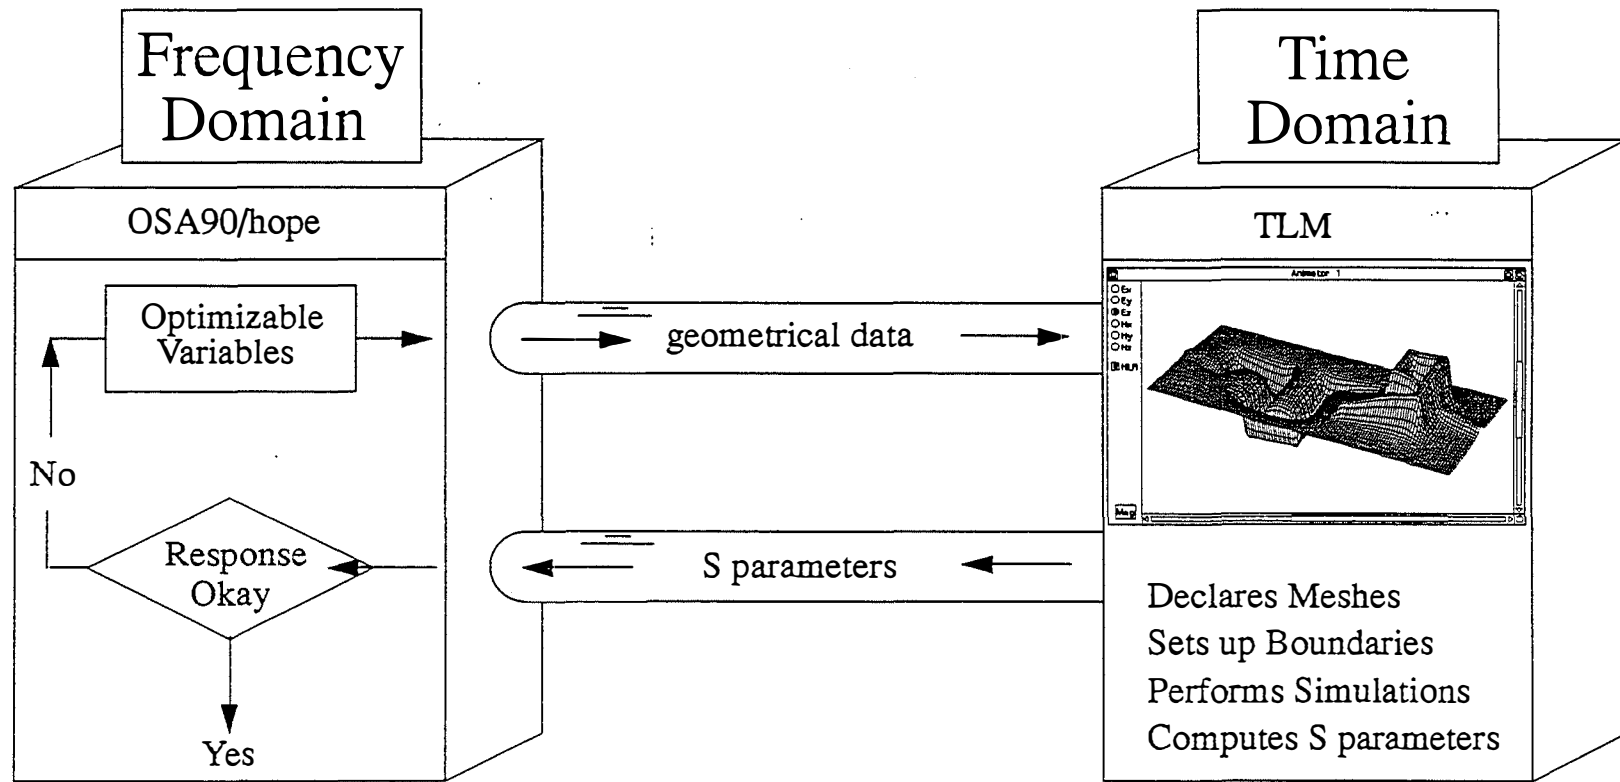


Simulation Example

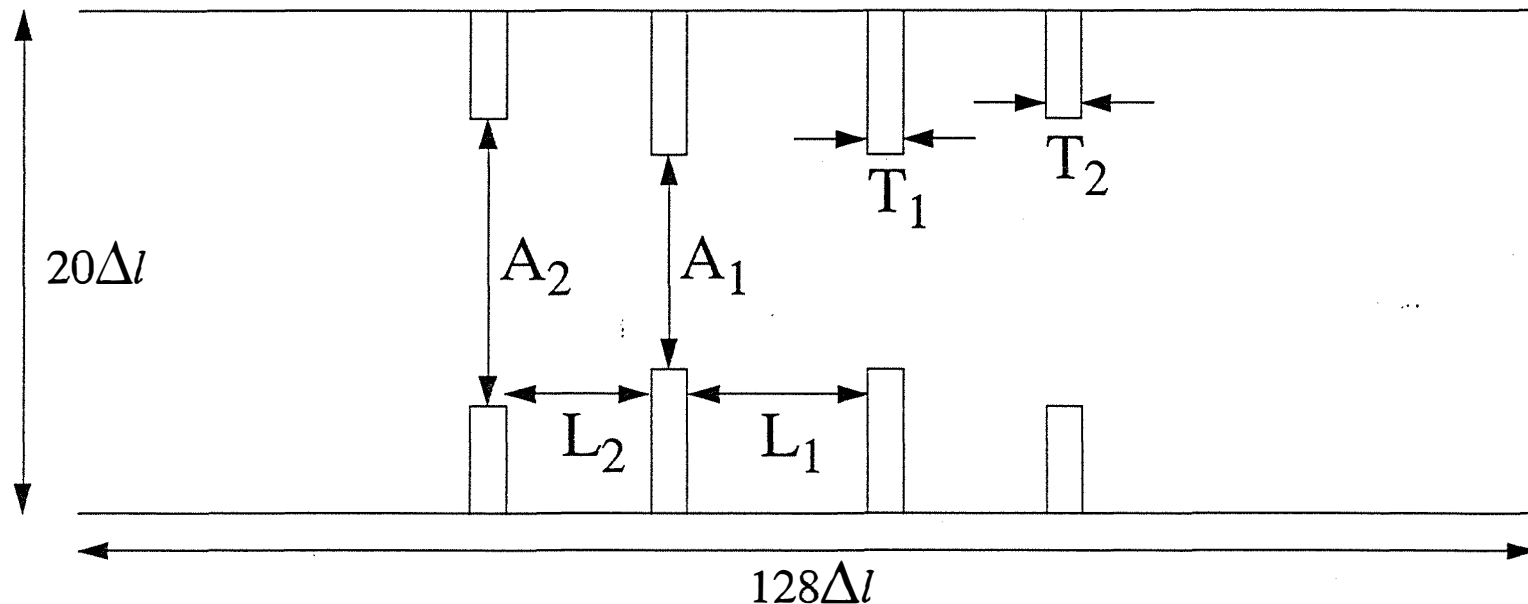


A bandpass filter in the WR28 rectangular waveguide, $\Delta l = 0.3556$ mm. Using single precision floating operation, the mesh requires 50K of RAM. The optimization goal is:

30.0 to 32.0 GHz step 0.1 GHz	$S_{11}=1$	$S_{21}=0$	weight=1
32.5 to 33.5 GHz step 0.1 GHz	$S_{11}=0$	$S_{21}=1$	weight=2
34.0 to 36.0 GHz step 0.1 GHz	$S_{11}=1$	$S_{21}=0$	weight=1


Initial Response (34 seconds/iteration)

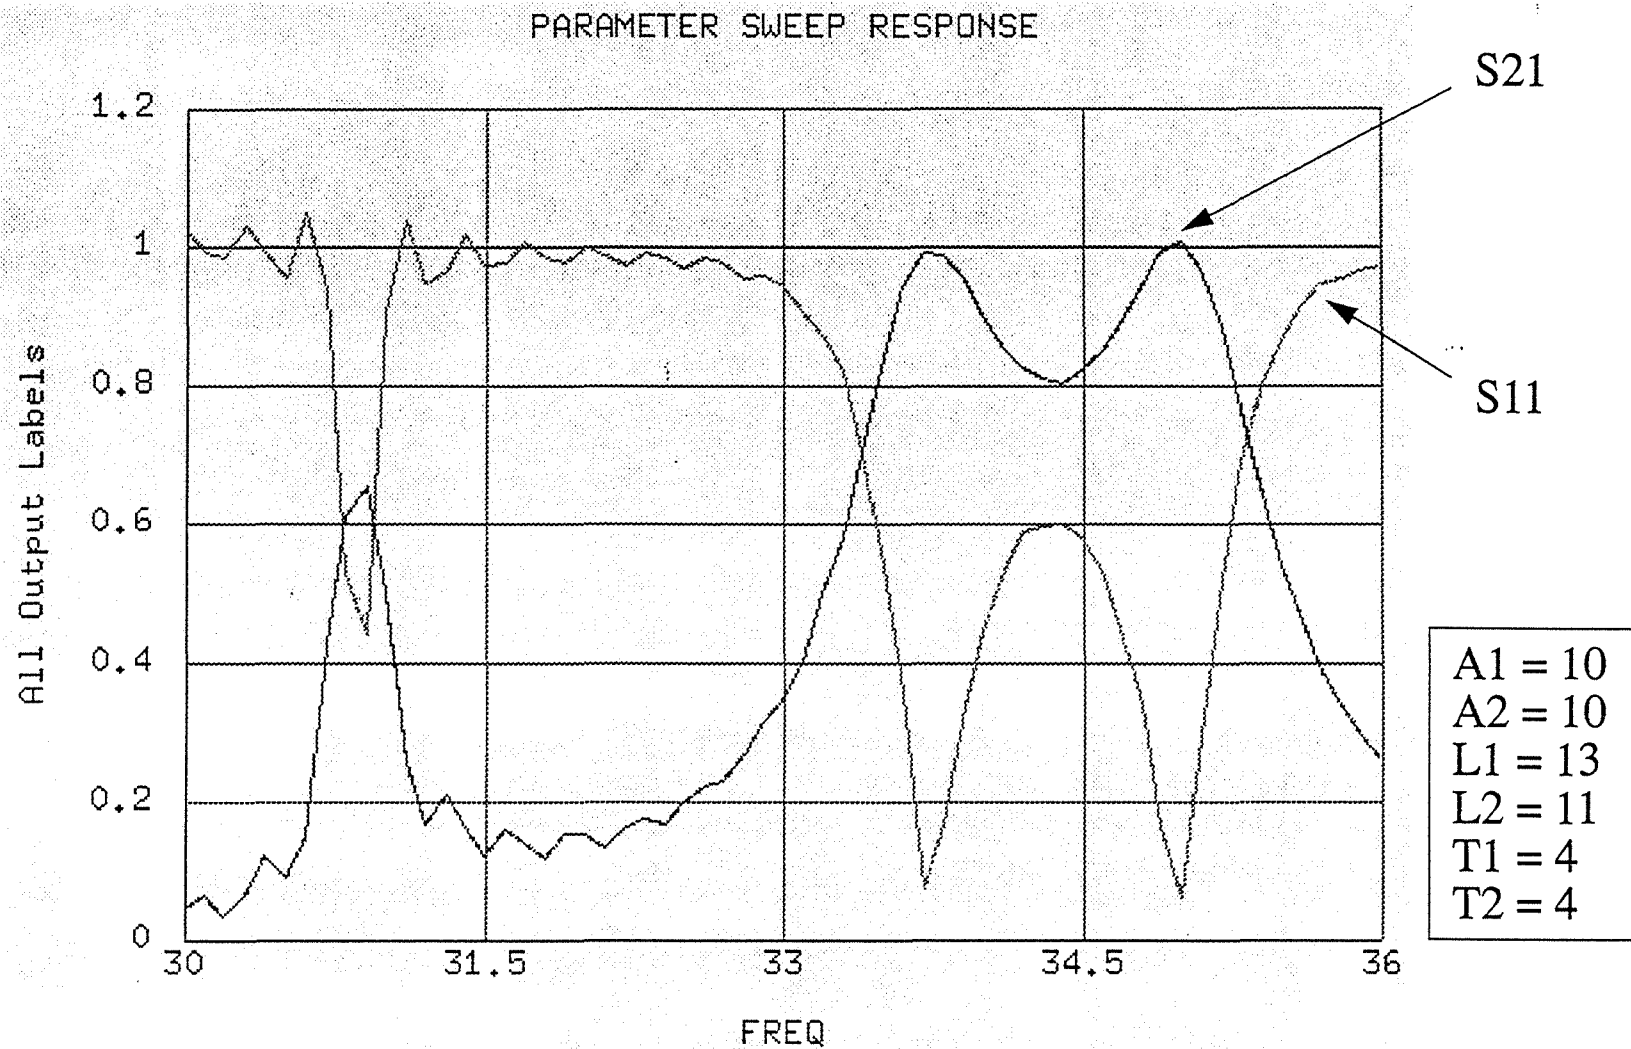


Intermediate Response (30 Iterations)

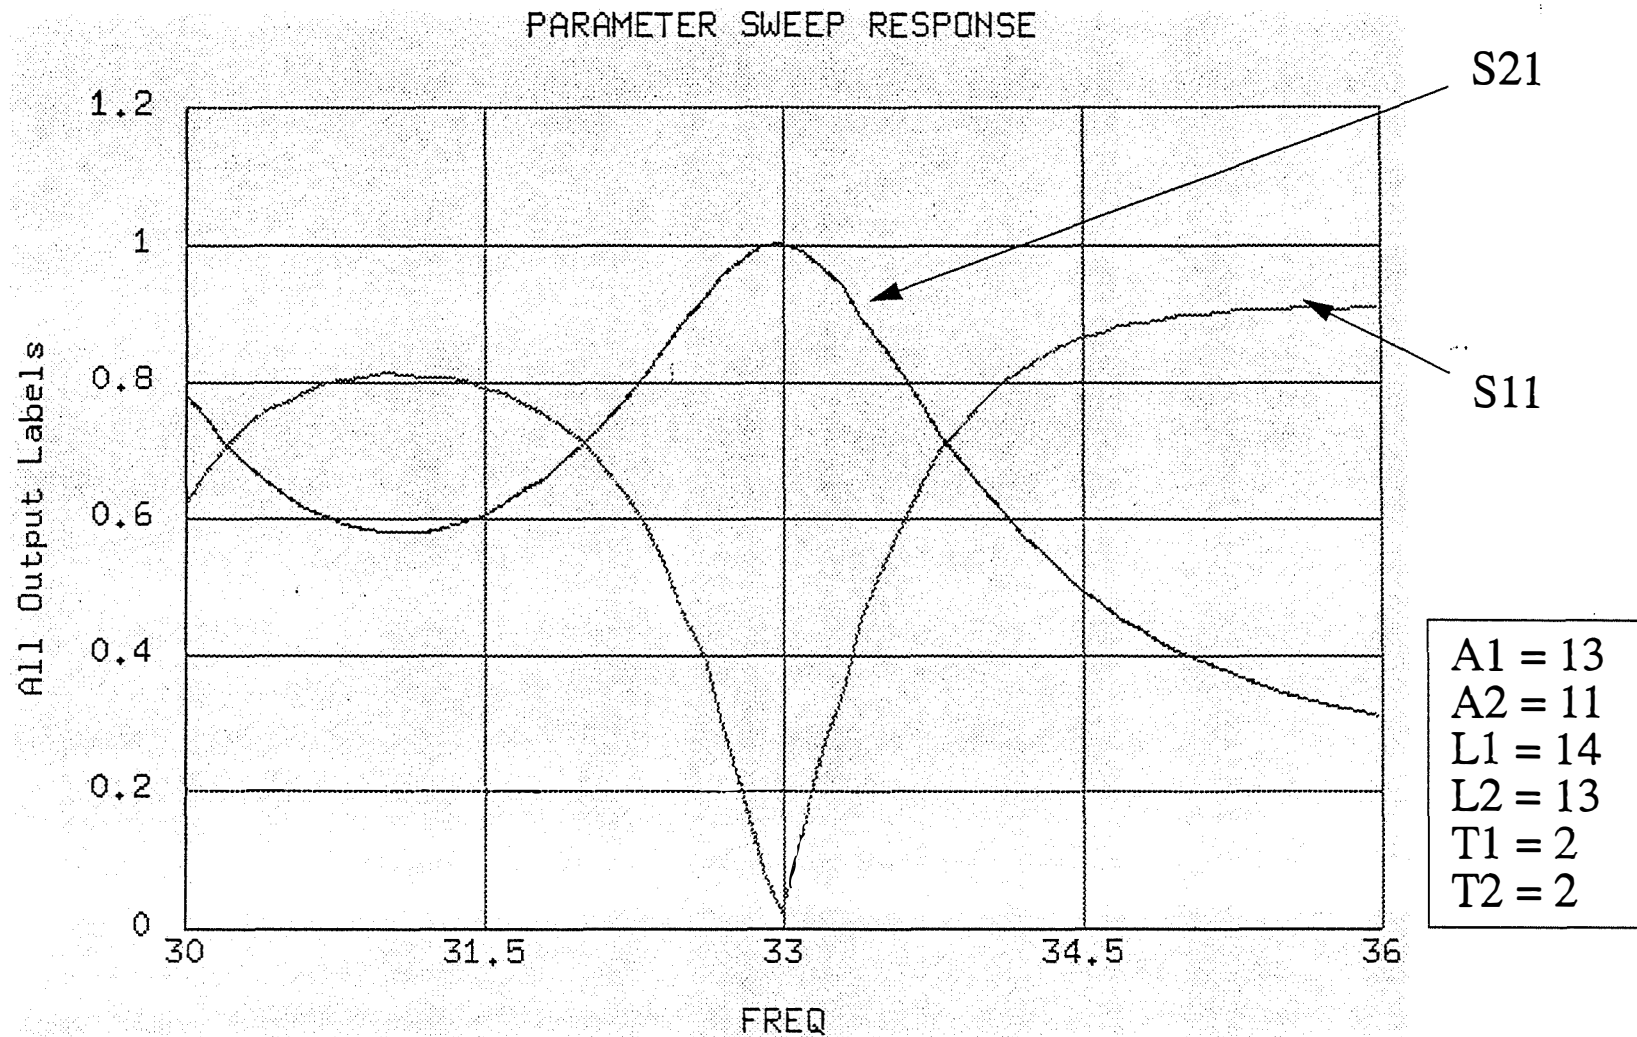

Intermediate Response (60 Iterations)

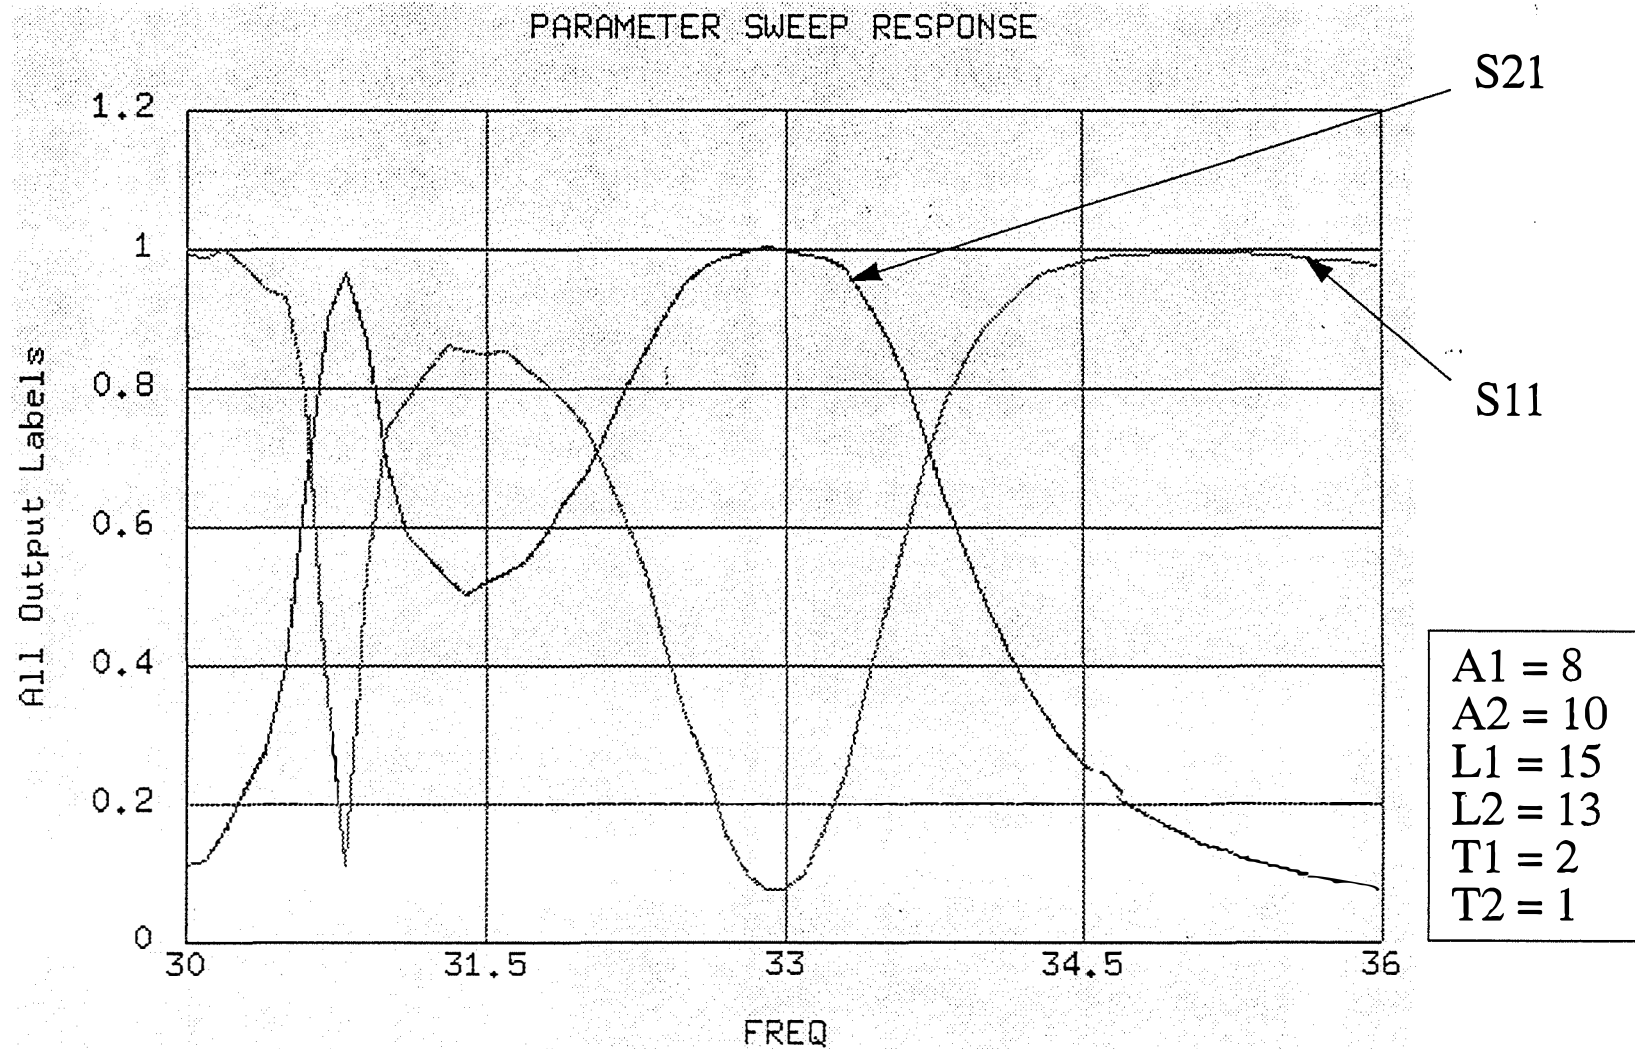

Optimized Result (180 Iterations)

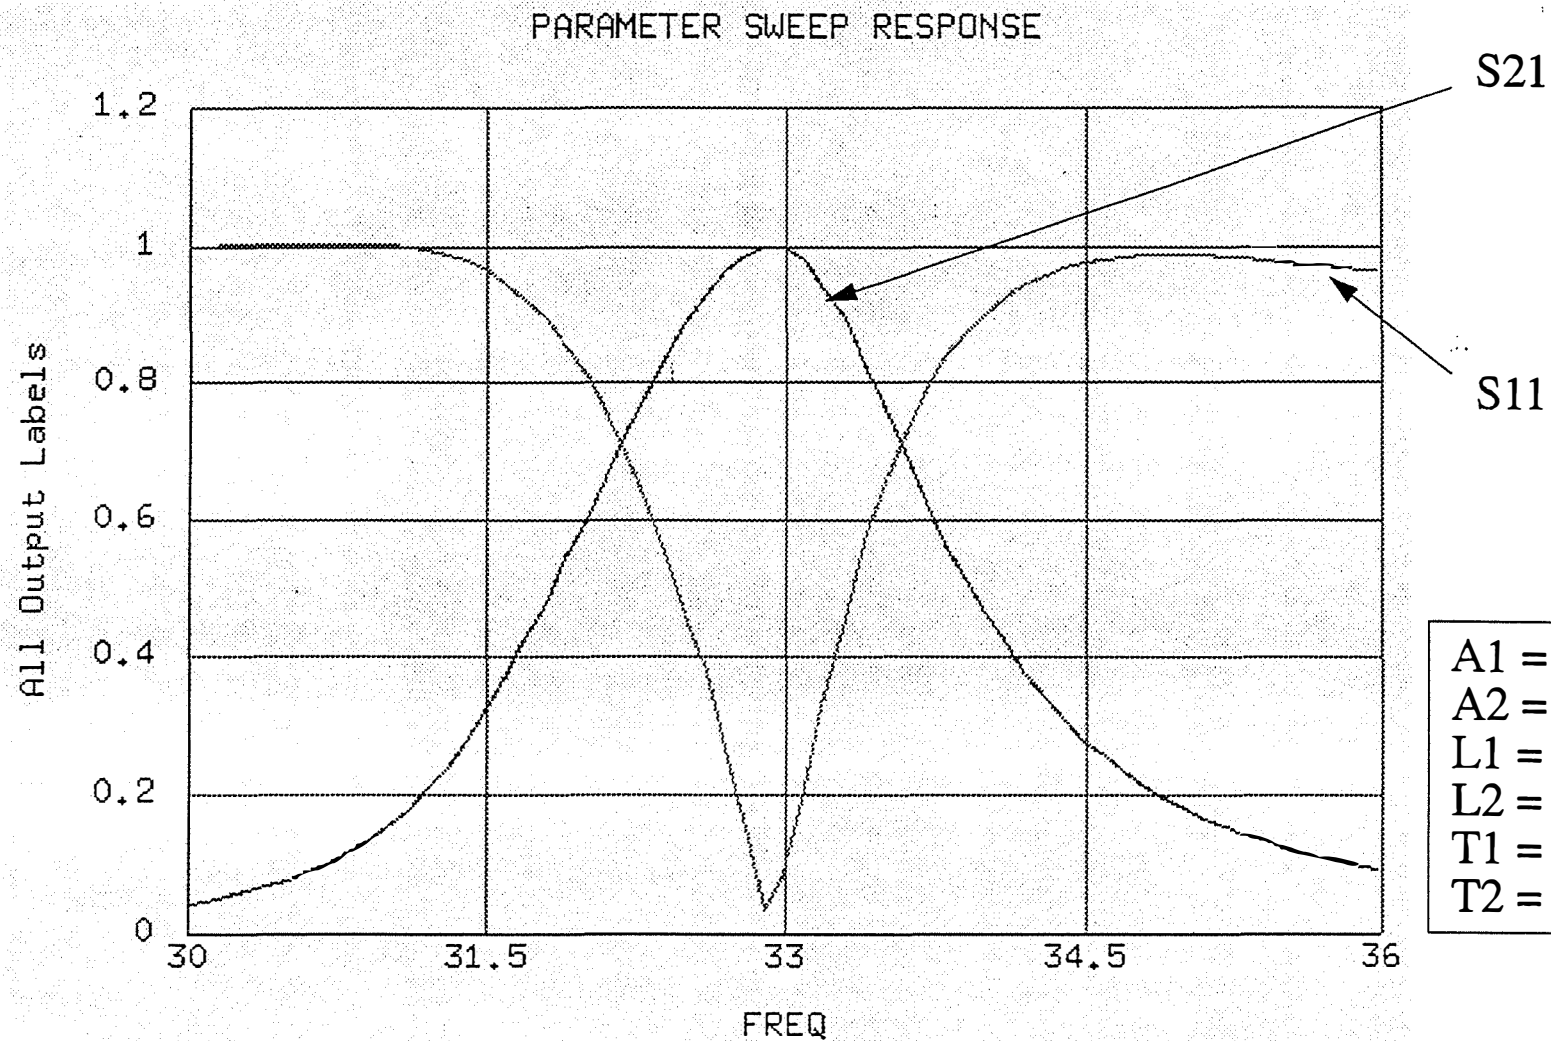

Some Data of Interest

Computer	CPU time (sec.)
Toshiba T5200/100	6500
IBM Model 90 XP486	1250
DEC RISC Model 5000	352
IBM RS6000 Model 350	117
HP 9000 Serial 700 Model 755	88
DECmpp 12000	12

- Execution time of the TLM field simulation module on various computers. The number of iterations is 4000 and the mesh size is 128×64 , which represents a full use of a DECmpp 12000 with 8K of processors.
- DECmpp 12000 is about 7 times faster than HP 9000 Serial 7000 Model 755.

Estimated 3D Requirements

- The difference in simulation speed between our 2D and 3D simulators for a 20×128 mesh is about 4 times.
- The memory requirement for a 3D-TLM simulation is 180K bytes.
- It is possible to use 3D simulation, say for a $10 \times 20 \times 128$ mesh, for the previous example; the estimated execution time per iteration and memory requirement would be:

$$10 \times 4 \times 34 = 1360 \text{ seconds, and}$$

$$10 \times 180 = 1800 \text{ K bytes.}$$




Advantages

- A single time domain field analysis yields information at an arbitrary number of frequency points within the desired bandwidth.
- Band limited excitation can be used to reduce unwanted frequency components with a corresponding gain in computer time, i.e. faster convergence.
- The computer expenditure depends mainly on the size of the computational domain and not on the complexity of the geometry.


Disadvantages

- Practitioners must grasp both the frequency and time domain concepts.
- There are no standard protocols for pipe communication in CAD/CAM system, which makes porting of the field simulators among them difficult.
- Powerful computers, preferably computers with massively parallel processors, with large amounts of memory and fast CPU are needed to run the field-based simulator.

The DECmpp 12000

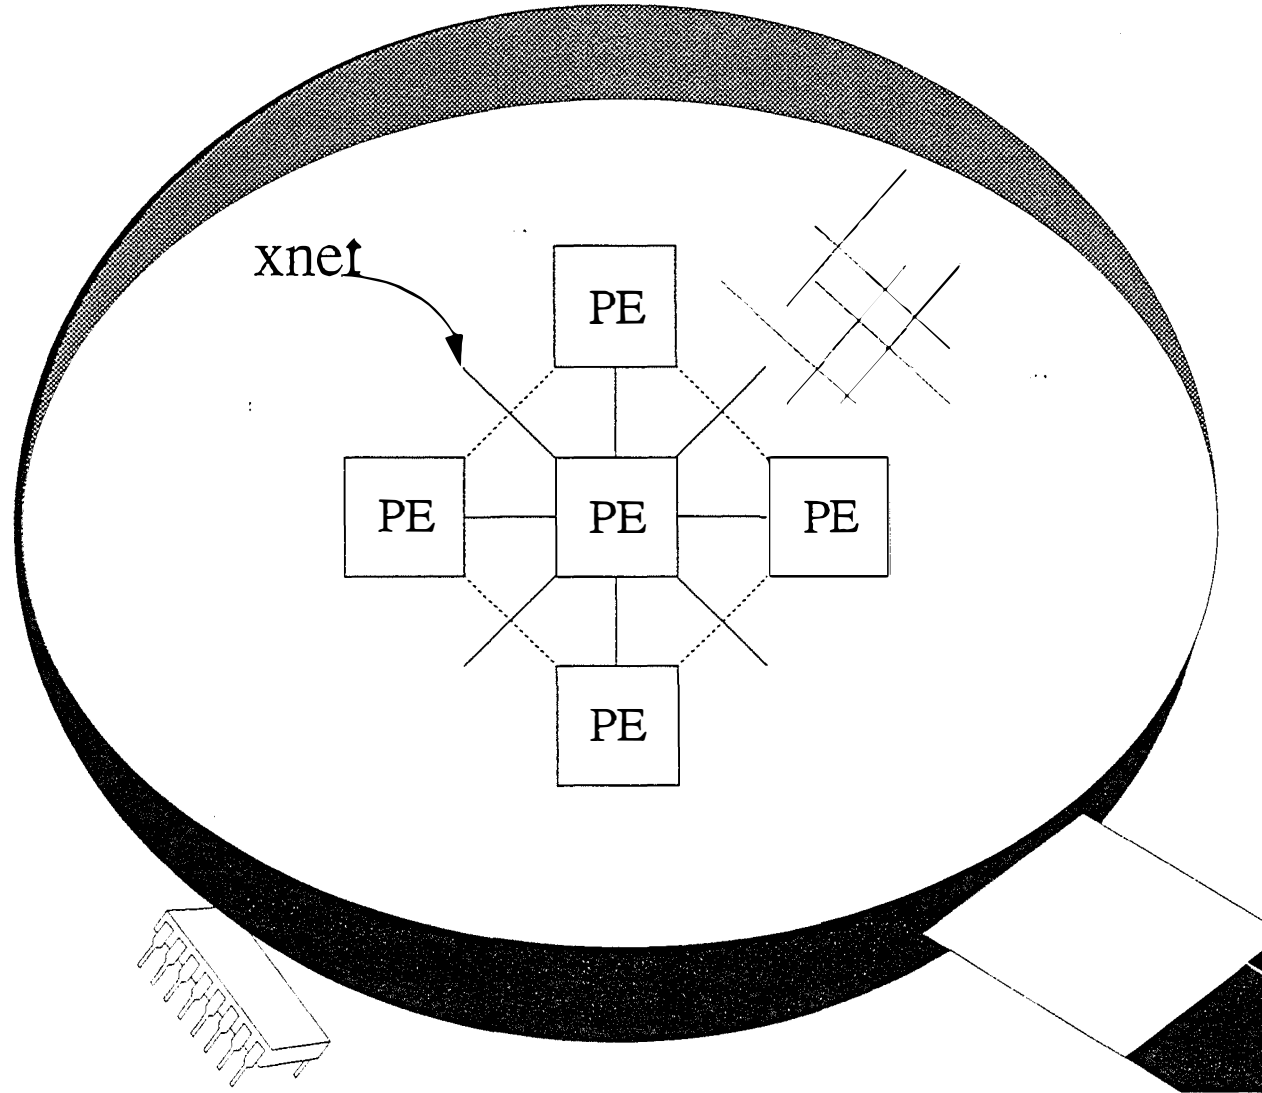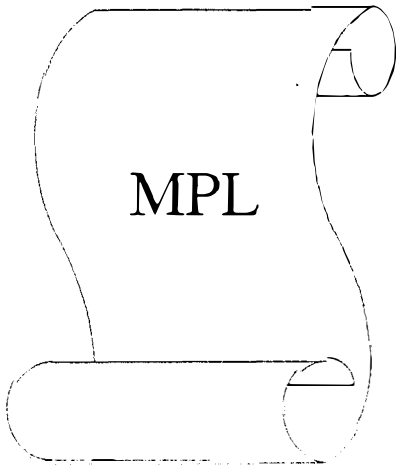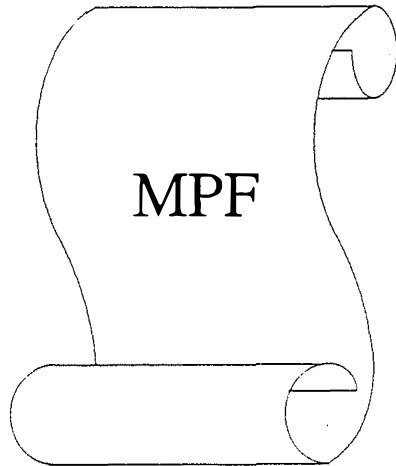

3D-TLM Mesh

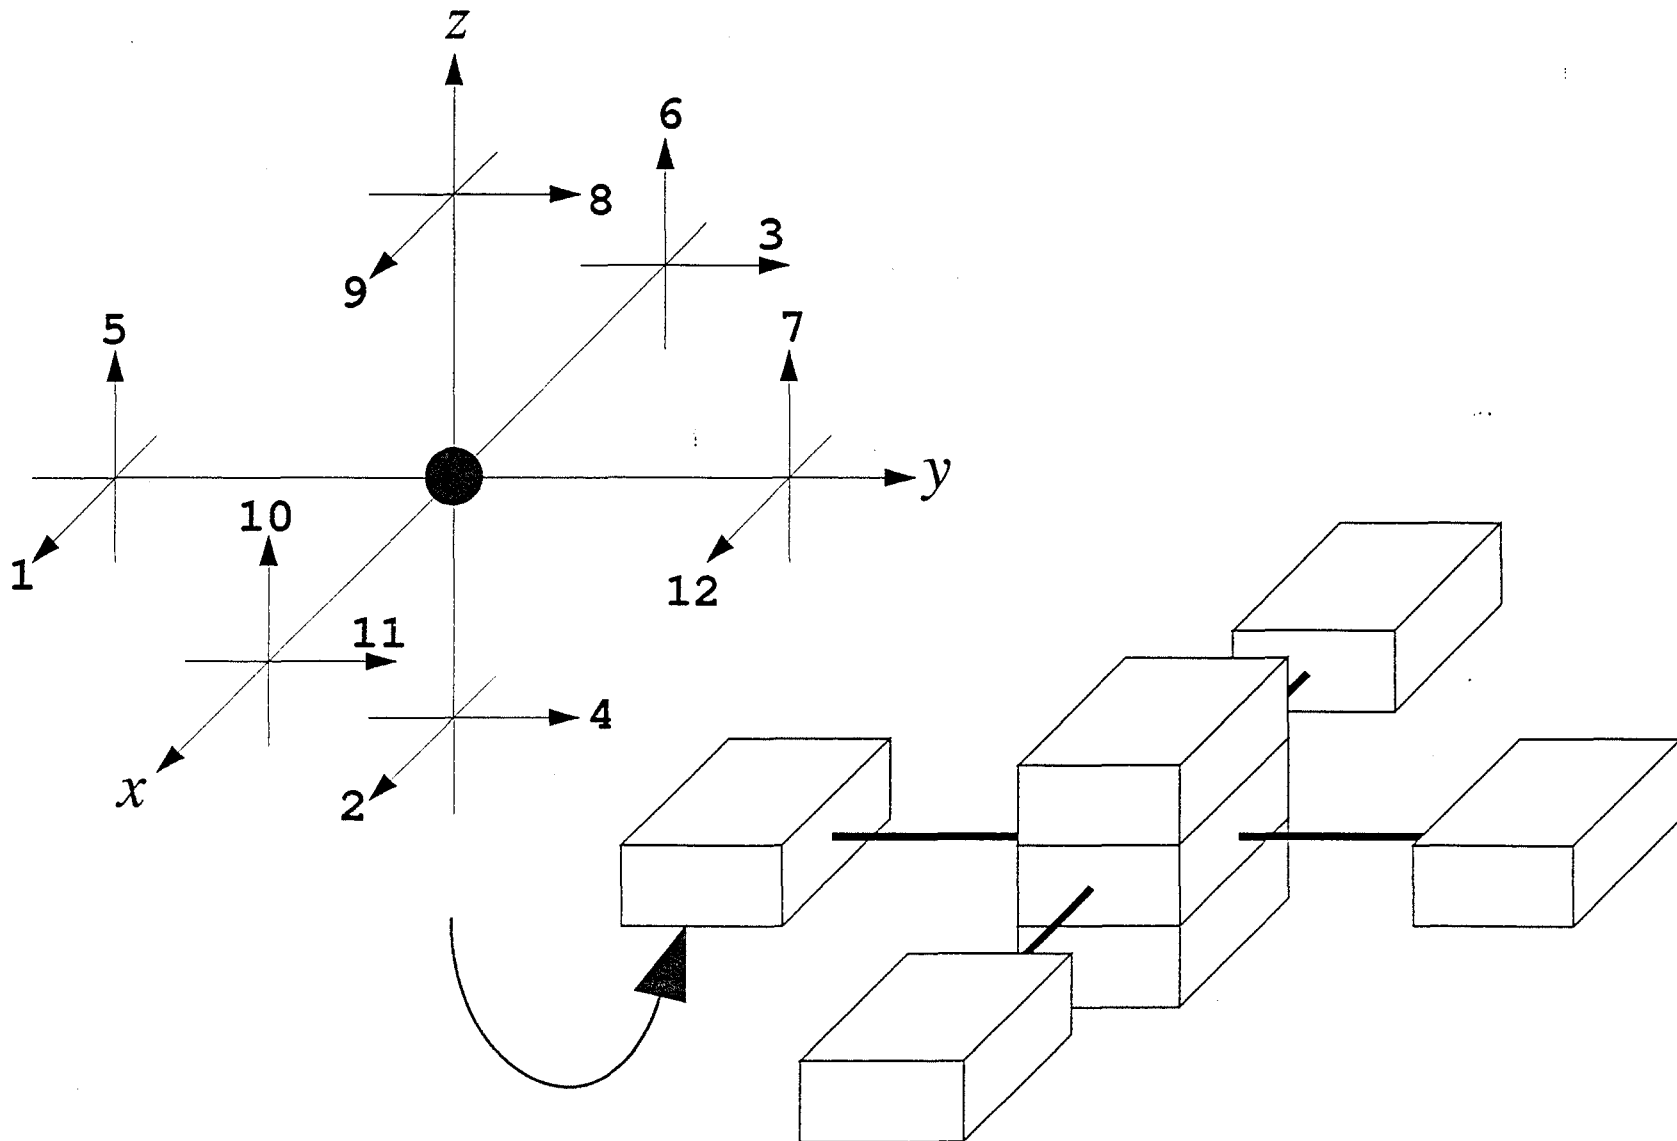


3D-TLM Transfer Algorithm

Parallel



```
for (z=0; z<z_size; z++) {  
    if (node[z].rx==NULL_REFL) {  
        swap(node[z].v6, xnetW[1].node[z].v10);  
        swap(node[z].v3, xnetW[1].node[z].v11);  
    }  
    if (node[z].ry==NULL_REFL) {  
        swap(node[z].v5, xnetN[1].node[z].v7);  
        swap(node[z].v1, xnetN[1].node[z].v12);  
    }  
    if (node[z].rZ==NULL_REFL) {  
        swap(node[z].v8, node[z+1].v4);  
        swap(node[z].v9, node[z+1].v2);  
    }  
}
```

DECmpp 12000 Constraints



- The DECMpp 12000 must be driven by a DEC station front-end. Hence OSA90/hope must communicate with the DECMpp 12000 via internet. This is a bottle neck for small to medium size problems.



- The dimensions of the problem must fit the dimension of the processor array in order to realize the machine's full computing power.
- Researchers must re-write the CPU time intensive serial algorithms into parallel ones.

Conclusion

- Successful linking of time domain electromagnetic field simulator (TLM) with a frequency domain CAD program (OSA90/hope) via datapipe has been demonstrated.
- The network piping feature allows OSA90/hope to control the TLM simulators which may run on massively parallel computers or workstations.
- The computational effort required for time domain simulation is larger than that for a specialized frequency domain simulator, however, it is independent of the geometrical complexity and offers considerably more flexibility. Further work is directed towards development of a more efficient TLM-Pipe software.

Any Questions?

What about...

It is easy!

Does it work?

